


## Disabling pop-up blockers in web browsers


Browser pop-up blockers must be disabled in order for KSIS and HRIS to work correctly. If pop-up blockers are not disabled, the progress wheel will spin but you will never be taken to location of the link you clicked. Most browsers allow you to disable the pop-up blocker on a specific site, as well as for all sites. Instructions for disabling pop-up blockers on specific browsers are listed below:

- Chrome
- Internet Explorer 8 and 9
- Internet Explorer 10
- Firefox 8
- Safari


### Chrome

The pop-up blocker is turned on by default. When the pop-up blocker is enabled, an icon  will appear in the address bar indicating that a pop-up has been blocked.


### Viewing a blocked pop-up

Click the pop-up blocker icon .


1. To view a blocked pop-up, click its link.

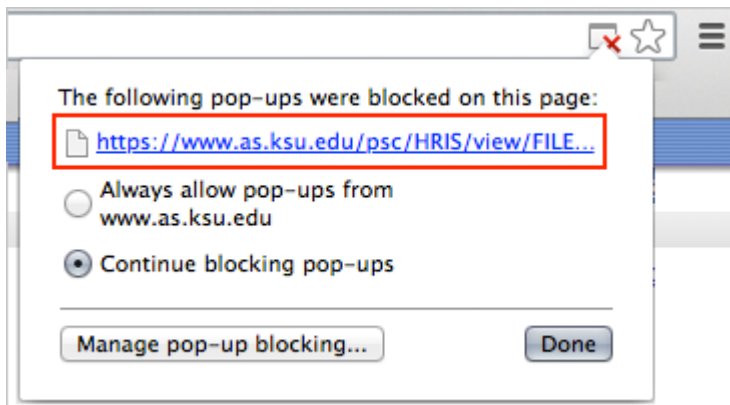


### Disabling pop-up blocker on a specific site

1. Click the pop-up blocker icon .


2. Click the **Always allow pop-ups from** option and then click **Done**.

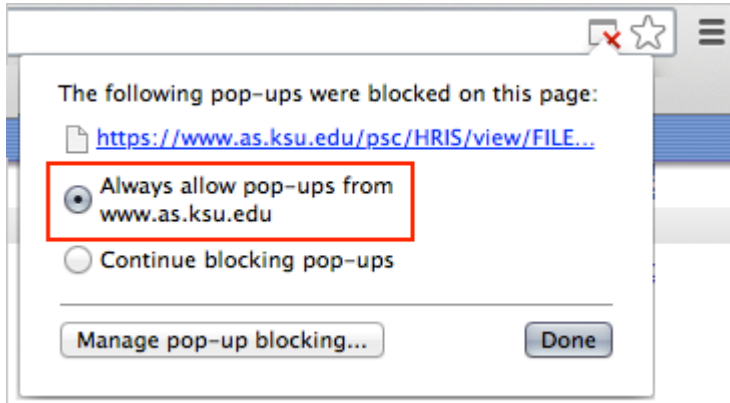


### Disabling pop-up blocker on all sites

1. On the browser toolbar, click the **Chrome** menu .
2. Click **Settings**.
3. Click **Show advanced settings**.
4. Under **Privacy**, click the **Content settings** button.
5. Under **Pop-ups**, select the **Allow all sites to show pop-ups** option.
6. Click **Done**.

### Managing pop-up blocking

1. To add or remove sites that allow pop-ups, do one of the following:
  1. Click the pop-up blocker icon .
  2. Click the **Manage pop-up blocking** button.

or


3. Click the **Chrome** menu  and then click **Settings**.
4. Click **Show advanced settings**.
5. Under **Privacy**, click the **Content settings** button.
6. Under **Pop-ups**, click the **Manage exceptions** button.
2. In the **Add new hostname** box type the URL of the site you want to allow pop-ups on and then click **Done**.



## Internet Explorer 8 and 9

The pop-up blocker is turned on by default. To disable it, do the following:

1. Open Internet Explorer.
2. On the **Tools** menu, point to **Pop-up Blocker** and then click **Turn off Pop-up Blocker**.

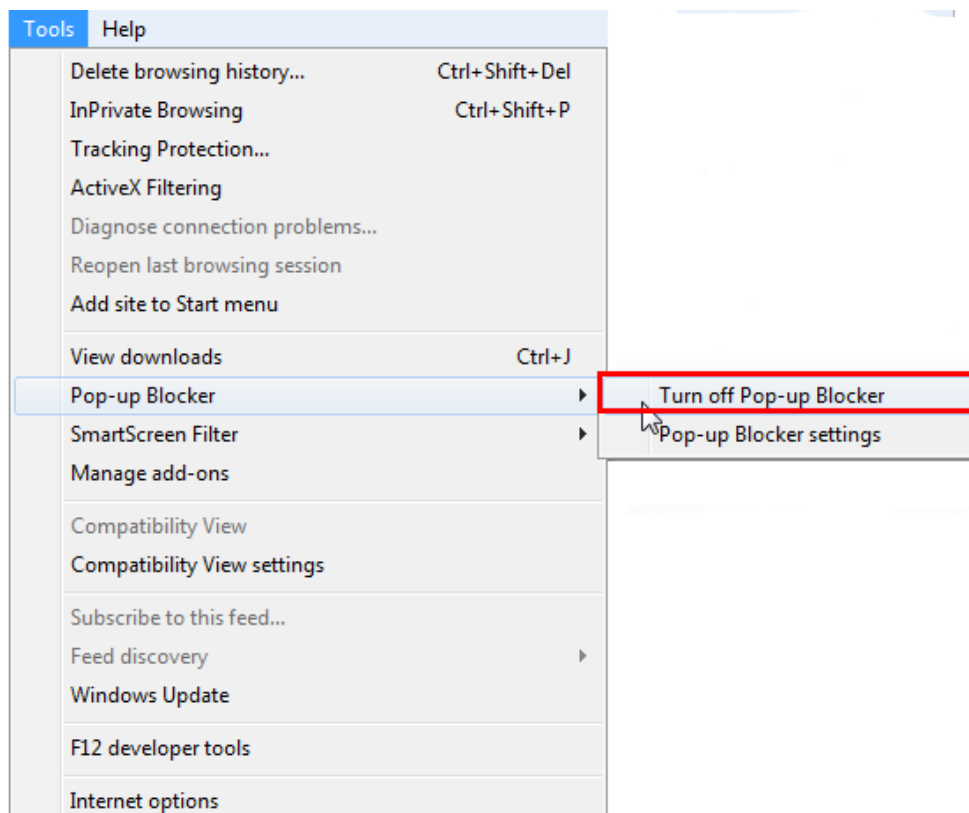

## Internet Explorer 10

The pop-up blocker is turned on by default. To disable it, do the following:

1. On the **Start Screen (Metro or Modern interface)**, type **control panel** and then press **Enter**.
2. Click **Internet Options**.
3. Click the **Privacy** tab and then do one of the following:
  - Click the **Turn on Pop-up Blocker** check box to disable the function.
4. Click **Pop-up Blocker Settings** and add the URLs of the web sites you want to allow pop-ups on.

Select **Apply** and then click **Close**.


5. Click **Close** again and then press the **Windows** key to return to the **Start Screen**.

## Firefox 8


The pop-up blocker is turned on by default.

### Disabling pop-up blocker for a specific site

1. Do one of the following:
  - Macs: On the **Firefox** menu, click **Preferences**.
  - Windows: On the **Tools** menu, click **Options**.
2. Click the **Content** tab and then click the **Exceptions** button.

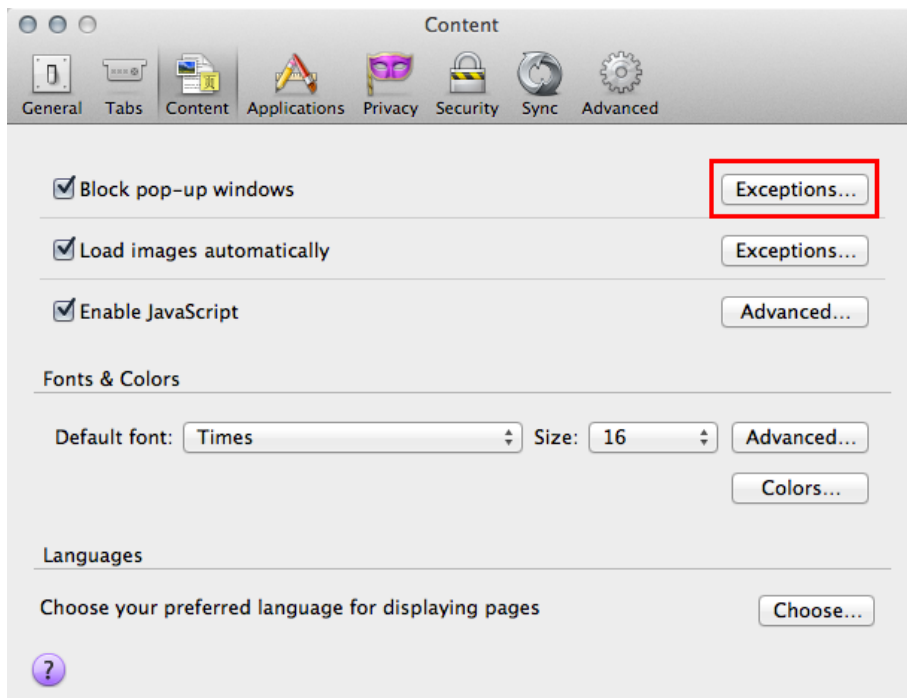


3. In the **Address of website** box, type the URL of the site you want to allow pop-ups on and then click **Allow**.

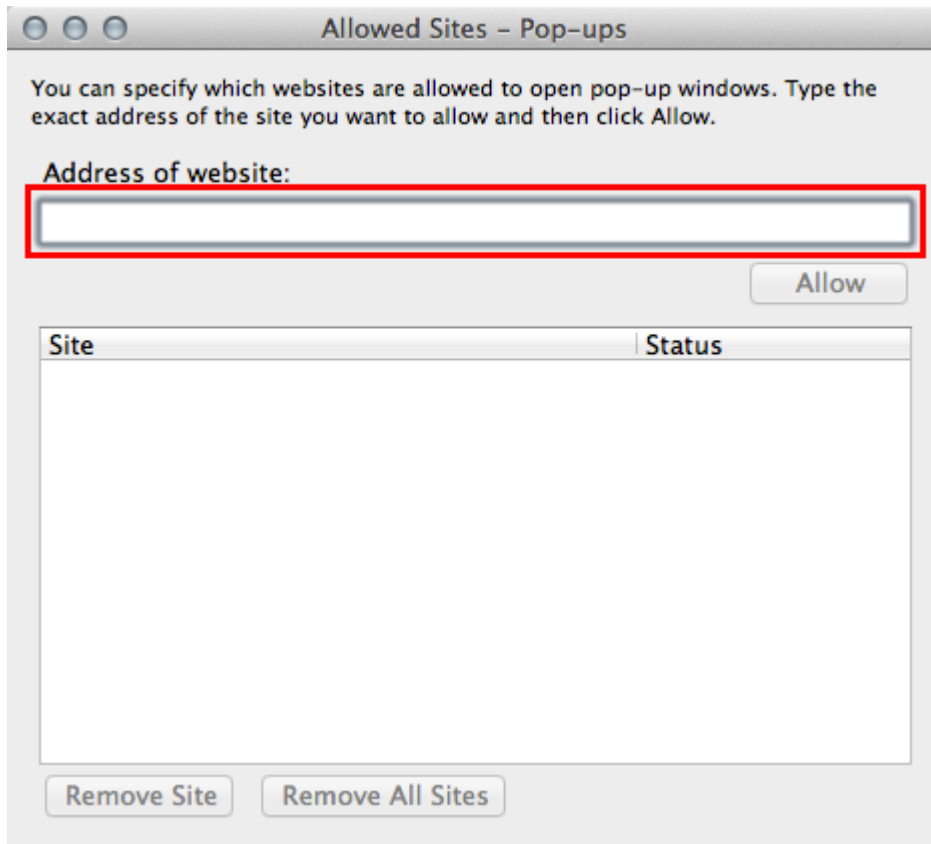

### Disabling pop-up blocker for all sites

1. Do one of the following:
  - o Macs: On the **Firefox** menu, click **Preferences**.
  - o Windows: On the **Tools** menu, click **Options**.
2. Click the **Content** tab and then click the **Block pop-up windows** check box to disable the function.

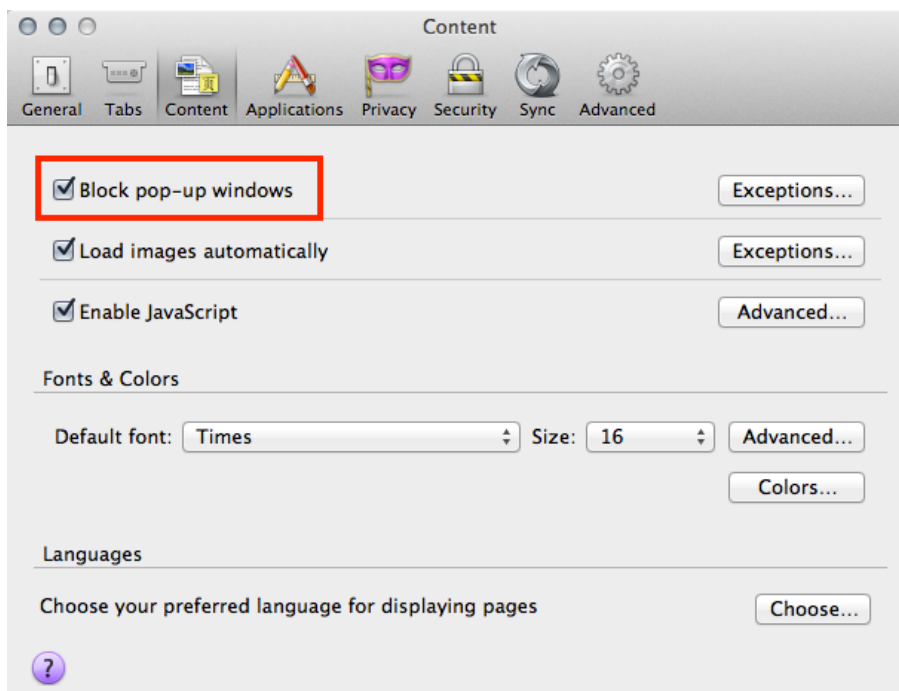

## Safari

The pop-up blocker is turned on by default. To disable it, do the following:

1. On the **Safari** menu, click **Preferences**.
2. Click the **Security** tab.
3. Click the **Block pop-up windows** check box to disable the function.

